# PRODUCT ID: 6286

Outdoor Blank-out LED Direct-view Sign

MODEL TCL77G-224H/120-277VAC



DIMENSIONS 7" H x 7" W x 2.5" D (est. 3.078 lbs)

CLASS CLASS: TCL Series Control Method: Switch (not included) or external relay.

### CONSTRUCTION

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep. Face Material: Injection molded, impact resistant Lexan hood with Lexan lenses Faces: Single Faced Sign Finish: Duranodic Bronze Mounting Channel: None

### ELECTRICAL

Flashing: Factory setting 55fpm. Input Voltage: 120-277 VAC UL/cUL Listed: Listed for wet locations

#### MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off. Sign Messages: See message table below

 MESSAGE
 LED/COLOR
 HEIGHT
 AMPS

 Green Indicator Dot
 Green Wide Angle LED
 4.0"
 0.053-0.023

 Green Indicator Dot (Flashing)
 Green Wide Angle LED
 4.0"
 0.053-0.023


 NOTE: Above messages are independently controlled.

 MAFFIC SAFETY MAREHOUSE The Best in Safety for Less
 TrafficSafetyWarehouse.com

 (847)
 966-1018

## **Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

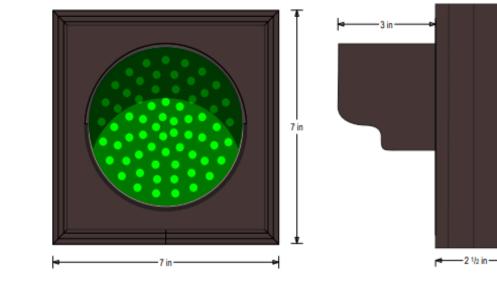

Frame Detail

