



Quik Sign[®]

PLASTICADE[®]

Stabilizing Brace

Prevents accidental or intentional spreading of sign faces too far. Use is optional at the discretion of the Sign Owner. Can also be used for sandbagging. Just “click-in” molded-in receptacle for storage.

Quik Sign Brace

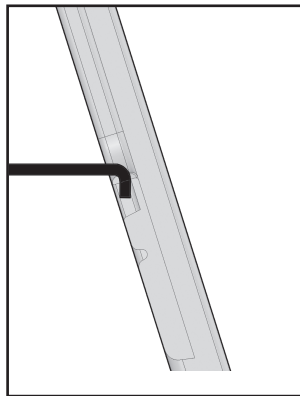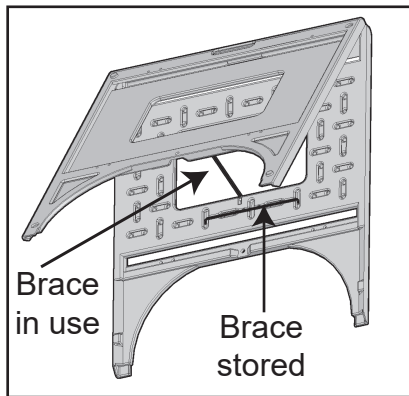

Sign Rider Insertion Instructions

Stand the sign frame on the ground, spreading open the sign faces only half way. Place the Sign Rider in the hinge openings between the sign faces. Now, move the sign faces apart until fully extended. The hinges will “grab” the Sign Rider.

For a more stable or permanent rider installation, drill holes into the rider to match up with the pins on the grabber hinge. Velcro[®] dots can also be used.

