

ROLL-A-POST™

Fillable Plastic Base Sign Stand

INSTRUCTIONS

Hardware Provided:

- 1 ea. Hex Bolt Zinc 3/8 x 5
- 2 ea. Hex Bolt Zinc 3/8 x 2-1/2
- 2 ea. Washer 3/8
- 3 ea. Locknut 3/8-16
- 1 ea. Vinyl Cap

1. Use one 3/8 x 5" hex bolt, and one locknut to secure plastic post to Roll-A-Post base. Refer to chart to determine which hole on post to use.
2. Use two 3/8 x 2-1/2 hex bolts, two washers, and two locknuts to attach sign.
3. Add Vinyl Cap to the top of the Power Post to help prevent water from entering.



Hole To Use To Attach Post To Base

Roll-A-Post 18	8.63" from post bottom
Roll-A-Post 24	11.5" from post bottom

Fill Base With Dry Sand:

Roll-A-Post 18: Fill base with 60-80 lbs. dry sand.

Roll-A-Post 24: Fill base with 150 -180 lbs. of dry sand.

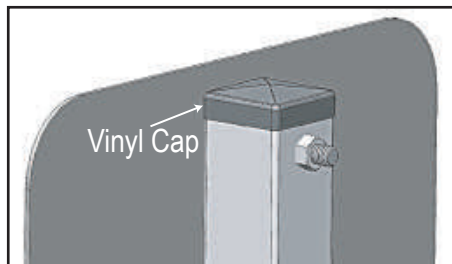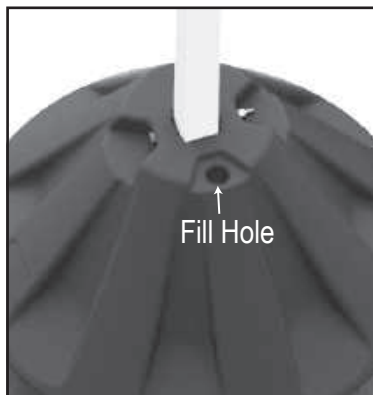

PLASTICADE®

Plasticade.com

Part #8338 Rev. 6